

2.2 Time Modules

CT32R

Multifunction | 24 ... 48 V AC/DC | 110 V DC

Time data

Timing functions	fig. 1 2: E, A, K, N, B1 3: E, W, B
Timing range	0.15 s ... 1.5 s / 0.6 s ... 6 s / 1.5 s ... 15 s / 6 s ... 60 s / 0.15 min ... 1.5 min / 0.6 min ... 6 min / 1.5 min ... 15 min / 6 min ... 60 min
Timing scale	0.15 s ... 60 min

Control circuit

Nominal voltage	24 ... 48 V AC/DC	110 V DC
Operating voltage range	19 ... 60 V AC/DC	130 V DC
Power consumption AC / DC	0.3 VA / 0.3 W	- / 0.3 W
Current consumption on supply A1-A2 AC / DC	- / 11 mA	- / 3 mA
Threshold voltage on input control B1 AC / DC	- / 9 V	- / 60 V
Rated frequency	0; 40 ... 60 Hz	DC

General data

Ambient temperature storage (no ice)	-40 ... 85 °C
Ambient temperature operation	-40 ... 70 °C
Dimension	fig. 2
Weight	25 g
Protection degree	IP 20
Housing material	PC

Product references

Description	Type	24-48	110
AC / DC supply	CT32R/UC...V		✓
DC supply	CT32R/DC...V		✓

Other voltages on request. Please contact support@comatreleco.com.
«...» List control voltage to complete product references.

Accessories

Socket	S3-MR S3-MOR S3-M1R
--------	---------------------------



fig. 1. Wiring diagram


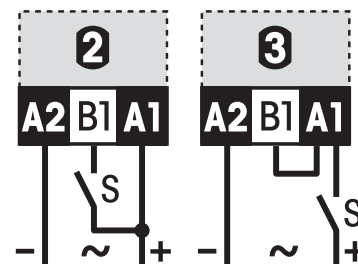


fig. 2. Dimension (mm)

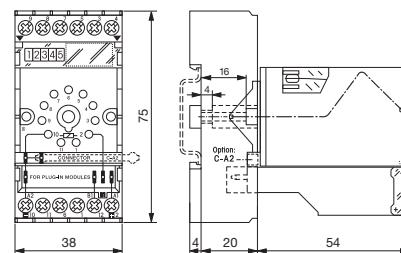

Technical approvals, conformities

Standards EN 45545-2; EN 50155

Approvals